
## **Monitor Mount**

BLM-TV-236-K







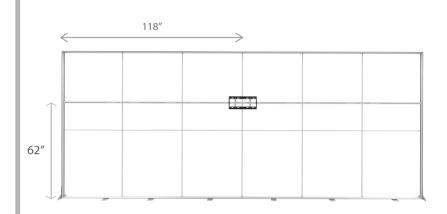




## **PRODUCT DESCRIPTION**

Designed for compatibility with BrightLine and StraightLine Displays, these mounts deliver a captivating "floating" screen sensation. Simply slide the TV bar into the frame, secure the monitor plate with screws, and attach your screen on the front. Side feet are included in the kit for extra stability. Graphics can be finished with four small pre-cut slits for convenient access, or you can customize your own cutouts as required.

### MONITOR SPECIFICATIONS

Holds monitors up to 25 lbs, VESA 200 X 200

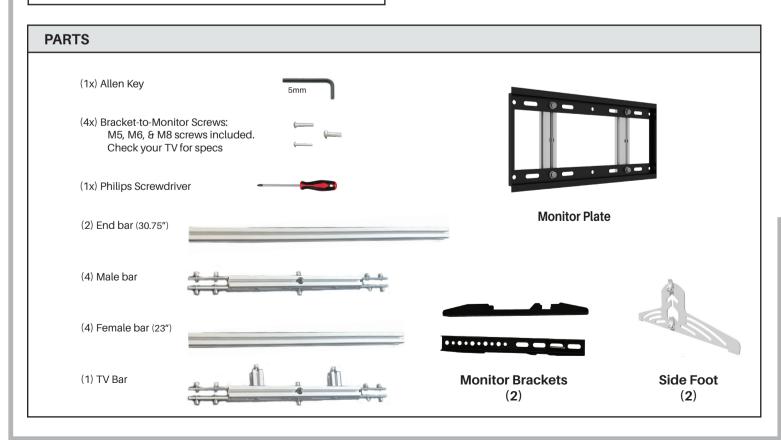


# **Monitor Mount**


BLM-TV-236-K





# StraightLine





- \*Connect the bar together matching to symbols. Secure by tightening screws.
- \*TV bar can be swapped with any of the male bars to change the monitor location.





































## **Monitor Mount**


BLM-TV-236-K 10ft Conversion








- \*Select bars to use for 10ft conversion
- (2) End bar
- (1) Male bar
- (1) Female bar
- (1) TV Bar
- $\star Connect \, the \, bar \, together.$ Secure by tightening screws.


































# **Cable Management**

BLM-TV-236-K





## **PARTS INCLUDED**

Adhesive Cable Clips (4x)

Reusable Velcro Cable Ties (5x)


Resealable Lock Bag








You will need 20ft Extension Cable




Connect the extension cable to your TV. Route cable inside the groove of the TV bar and use cable ties to secure in place.



Attach wire clips to the frame. Then route the cable through and secure within the clips.



Route cable through the bottom corner of the frame.



Secure the vertical end of the graphic first, adjust cable, then finish with the bottom of the fabric