

FALCON FLAG SMALL

FLAGS
 PRODUCT CODE: FSBS-SB-SM or FSBS-XB-SM



Single sided w/spike base



Front

Double sided w/X-Base base

Back



Standard Bases:

Spike Base

or

X-Base

X-Base w/ optional water bag

PRODUCT DESCRIPTION

Perfect for quantity orders, the new flagpole hardware redesign for our Best Seller Falcon Flag is the economical choice. Plus, with upgraded hardware, its new pole connections give more height options. Now in more sizes, you can find your favorite Falcon flags in these heights: XS (7'), SM (8.25'), MD (10.5'), LG (14'), XL (17'). Falcon Flag is intended for display outdoors. Insert the spike base into grass or use the X-base to stand on concrete. We custom print your graphic artwork on polyester mesh by the process of dye sublimation. Our inks heavily saturate the material to create a "bleed-through" effect for our single-sided prints, and double-sided prints are finished with a silver-gray blocker that lays between. Black flag trim is sewn on the edge of the graphic (pole-side), leaving a pocket for pole insertion. A set of grommets are installed on the bottom of the trim in which the short bungee cord (included) can loop through and snugly attach the graphic to the base.

FLAG HEIGHT	8.25' H (From base of pole)
GRAPHIC SIZE	20.25"W x 80.5"H

GRAPHIC MATERIAL

MESH FABRIC

GRAPHIC FINISHING

Hemmed edges with pole pocket trim

DISPLAY CONSTRUCTION

Carbon composite flag poles

SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight	4 lbs (stand only w/spike base)
	5 lbs (stand, spike base and graphic)
Shipping Dimensions	9 lbs (stand only w/x-base)
	10 lbs (stand, x-base and graphic)
Shipping Dimensions	48"L x 4"W x 4"H

GRAPHIC TURN AROUND TIME


2 business days after proof approval

AVAILABILITY	CA, PA, and PFC
WIND SPEED RATING	18-23mph


FALCON FLAG SMALL

FLAGS
PRODUCT CODE: FSBS-SB-SM or FSBS-XB-SM

PARTS LIST

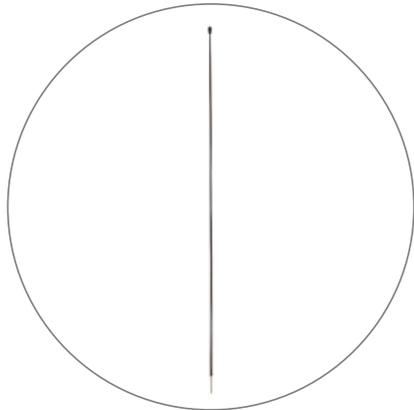

(qty 1) Pole #1

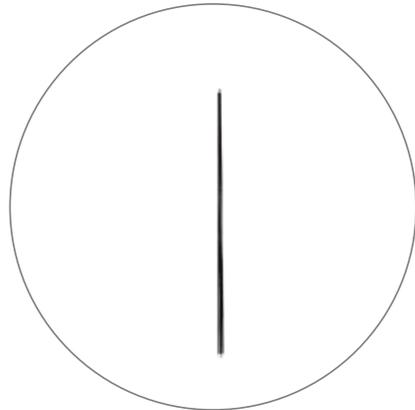

(qty 1) Pole#2



(qty 1) Pole#3



(qty 1) Carry Bag

STANDARD BASE OPTIONS



(qty 1) Spike Base

OR



(qty 1) X-Base

FALCON FLAG SMALL

FLAGS

PRODUCT CODE: FSBS-SB-SM or FSBS-XB-SM

AVAILABLE ACCESSORIES



Triangle Spike Base
FAL-TRI-SB



Water Bag
WBAG



Canopy Mount
FAL-FLGCNCT
(Must use with 0° or 30° fixed mount)



Fixed Mount - 0 Degree
FAL-FM0D



Fixed Mount - 30 Degree
FAL-FM30D




Fixed Mount - 90 Degree
FAL-FM90D

FALCON FLAG SMALL

FLAGS
PRODUCT CODE: FSBS-SB-SM or FSBS-XB-SM

SET UP INSTRUCTIONS

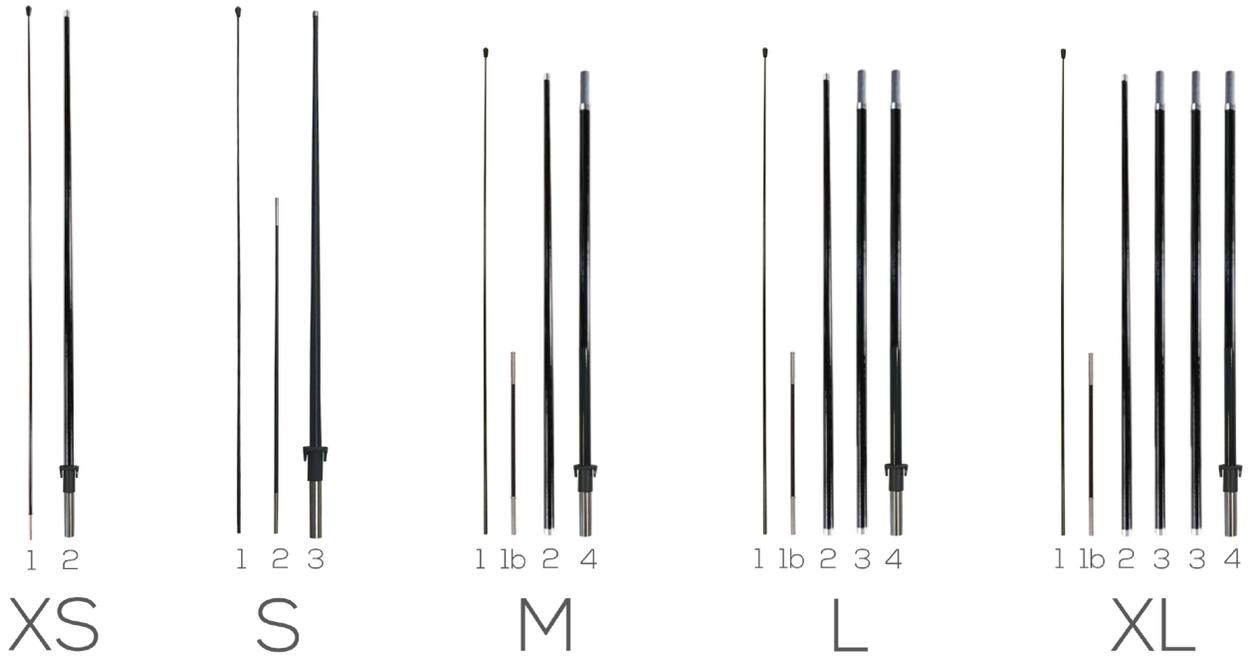

- A. Flag poles are numbered for easy assembly. Follow guide above for assembly order (Note: Medium flagpole can convert to Large and X-Large size by adding additional pole #3's)
- B. Insert tip of flagpole into the black pocket trim on the flag and push it all the way to the end of the pocket.
- C. Secure flag by lacing the bungee through the grommets on the pocket trim and tethering it to the hook at the base of the pole.
- D. Insert pole into desired base to display flag.

Spike Base
Insert the pointed end of the spike base into the ground. Insert the post with rubber grommets into the opening on bottom of the flagpole to display flag.



X-Base
Unfold legs and insert the post with rubber grommets into the opening on bottom of the flagpole to display flag. A water bag can be added for added stability.



FALCON FLAG SMALL

FLAGS

PRODUCT CODE: FSBS-SB-SM or FSBS-XB-SM

POLE DIAMETERS

Section	OD (includes metal ring) unit:mm	OD (doesn't include metal ring) unit:mm
Falcon/Sunbird S-1 top	N/A	3
Falcon/Sunbird S-1 bottom	8	7
Falcon/Sunbird S-2 top		7
Falcon/Sunbird S-2 bottom	8.9	7.9
Falcon/Sunbird S-3 top	13	12
Falcon/Sunbird S-3 bottom	24.5	23
Falcon/Sunbird M-XL-1 top	N/A	4
Falcon/Sunbird M-XL-1 bottom	8.6	7.6
Falcon/Sunbird M-XL-1B top	8.9	7.9
Falcon/Sunbird M-XL-1B bottom		
Falcon/Sunbird M-XL-2 top	13	12
Falcon/Sunbird M-XL-2 bottom	24.5	23
Falcon/Sunbird M-XL-3 top	24.5	23
Falcon/Sunbird M-XL-3 bottom	24.5	23
Falcon/Sunbird M-XL-4 top	24.5	23
Falcon/Sunbird M-XL-4 bottom	26.5	25
Falcon 7ft tip rod-top	N/A	3
Falcon 7ft tip rod-bottom	8.9	7.9
Falcon 7ft bottom rod-top	12.3	11
Falcon 7ft bottom rod-bottom	22.2	19.5

Spike/X base mounting point diameter : 16.0mm, +0/-0.2mm